





SunPOS

POS Workstation

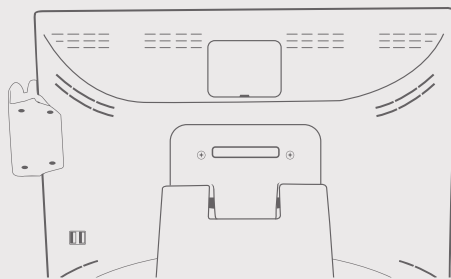

Removable
HDD Cover

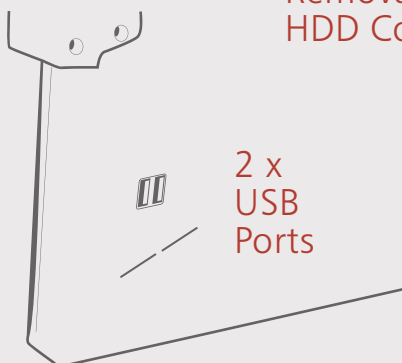

2 x
USB
Ports



Slim I/O Panel

- ▶ Ultra Slim Bezel
- ▶ 15.1inch High Resolution Display
- ▶ Variety of configurations: J4125, J6412, I3-5005, I5-5200, I3-1115G4 & I5-1135G7
- ▶ True-Flat Front Bezel
- ▶ Projected Capacitive Touch screen
- ▶ VFD customer display
- ▶ 10.1inch Second Display
- ▶ MSR, MSR+ ibutton Reader

Specifications

Config	CPU	Intel® Celeron® J4125 - 2.0GHz Fan-less (7 th Gen)	Intel 5th Gen CPU, i3-5005, i5-5200 (5 th Gen)	Intel® Celeron® J6412 - 2.0GHz Fan-less (11 th Gen)	Intel® Core™ i3-1115G4 / i5-1135G7 – Tiger Lake CPU (11 th Gen)
	Ram	4Gb DDR4 – 2400Mhz (Opt 8Gb)	4Gb DDRIII – 1600Mhz (Opt 8Gb)	4Gb DDR4 - 3200Mhz (Max 16Gb)	4Gb DDR4 3200MHZ (Max 16Gb)
	SSD	128Gb SSD MSATA	128Gb SSD MSATA	128Gb MSATA SSD	128Gb M2 SSD
Screen	Screen Size	15.1"			
	Interface	LVDs			
	Resolution	1024*768			
	Brightness	220-250nits			
Touch	Touch Panel	Capacitive , 10 Points, IP54			
	OS Support	Win 10, 11, Linux	Windows 7, 8,8.1, 10, Linux	Win 10, 11, Linux	Win 10, 11, Linux
Interfaces	RS232	2 (Powered)	2	2 (Powered)	2 (Powered) – Com 2, Com 3
	USB	2 x USB 2.0, 2 x USB 3.0 (I/O), 3 x USB 2.0	2 x USB 2.0, 2 x USB 3.0 (I/O), 3 x USB 2.0	2 x USB 2.0, 2 x USB 3.0 (I/O), 3 x USB 2.0	2 x USB 2.0, 2 x USB 3.0 (I/O), 3 x USB 2.0
	HDMI	1	1	1	1
	VGA	1	1	1	1
	Audio	1	1	1	1
	LAN	100M	100M	1000M	1000M
	Speakers	Optional			
	PCIE / M2	1 (WIFI OR 4G)	1 (WIFI OR 4G)	1 x M2 (For WIFI OR 4G)	1 x M2 (For WIFI OR 4G)
Adapter	Power Adapter	12V, 5A	12V, 5A	12V, 5A	12V, 5A
	Colour	Rubber Paint Black or Pure White			
Optional	VFD Customer Display	2*20, USB or RS232, 5V			
	Second Display	10.1inch without Touch screen			
	MSR	3 Track, USB			
	ibutton Reader	Yes			
	Wi-Fi	802.11b/g/n/ac			
	Bluetooth	5.0			



PoS Tektronics Limited

Rooms 1318-19, 13 / F, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
pcpos@yahoo.com

www.postektronics.com

